

Mini Class

Launch/Inline Amplifier with 4 SAT IF inputs

SAT IF



If the terminating resistor is plugged on the amplifier turns into inline amplifier mode (DC pass on all 4 trunk lines).



4 DC - decoupled terminating resistors are shipped with the SBK 4416 NF to terminate the trunk lines.
ZFR 75 DC/Set (Art.No.: 871511)

SBK 4416 NF


Launch Amplifier for SMS 4447 F and SMS 4487 F.

SAT IF:

- LNB supply voltage can be switched off (by using the included decoupled terminating resistor) to use the device as inline amplifier.

Miscellaneous:

- Including external wall power supply **SNG 18/1000** (18V/1A).
- Wall mounting adapter included.

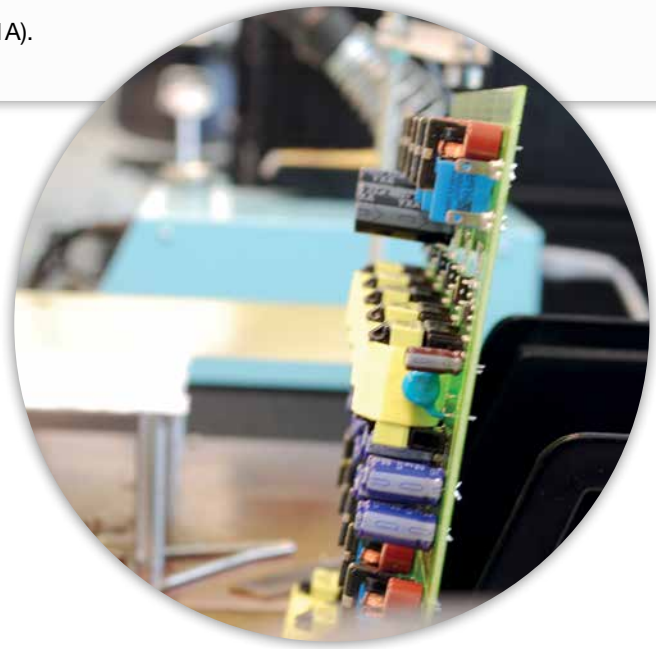

Model Art. No.	SBK 4416 NF 842502
EAN	4040326425022
Inputs/outputs	4/4
Gain SAT 950...2200 MHz	14 ... 19 dB
Output level max. 950...2200 MHz 35 dB IMA ₃ /EN 60728-3	112 dB μ V
Isolation trunk/trunk	typ. 35 dB
LNB remote current	12V/400 mA
Mains power supply U~	Incl. wall power supply 100-240V/47-63 Hz
Power consumption incl. LNB	max. 8 W
Ambient temperature	-20 ... +50 °C
Dimensions (mm)	90 x 71 x 27